Fiberlane LLC.
9254 Richmond Road
US - 18013 - Bangor, PA
USA

Contact:
Telefon: +1 610 498 4474
Fax: +1 610 498 2602
E-Mail:
info@fiberlanellc.com

Overview

Lock EWA 12.1509 / 150 Nm / 400 V - 8,8 rpm. - We 66

Lock GmbH

Product number: 31147724

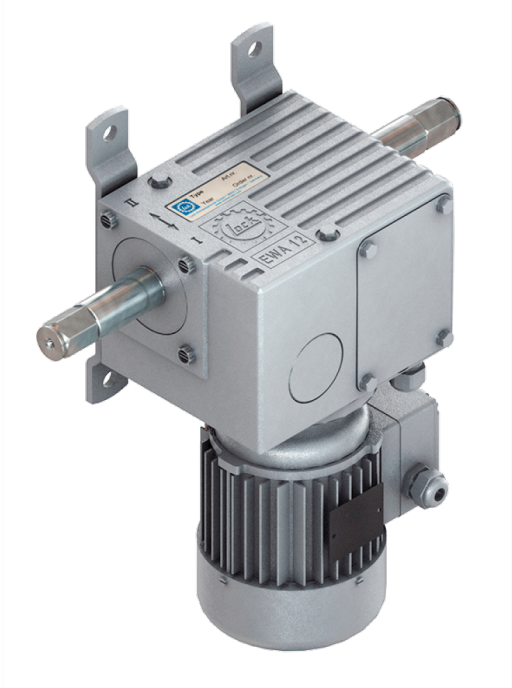

All prices excl. VAT plus shipping costs and possible delivery charges, if not stated otherwise.

Fiberlane LLC.
9254 Richmond Road
US - 18013 - Bangor, PA
USA

Contact:
Telefon: +1 610 498 4474
Fax: +1 610 498 2602
E-Mail:
info@fiberlanellc.com

Description

- **Application:** Drive unit for horizontal shading systems
- **Torque:** 150 Nm
- **Speed:** 8.8 rpm
- **Voltage:** 400 V, 3~, 50 Hz
- **Power:** 0.30 kW
- **Current:** 1.55 A
- **Shaft:** Hexagonal 66 mm
- **Features:** Extremely quiet, self-locking double worm gear - maintenance-free
- **Mounting:** Universal mounting via standard base (removable feet) - rear or optionally left-side (symmetrical)
- **Limit switch:** Integrated precision gear limit switch END 20 for 580 shaft revolutions (micro switch cURus)
- **Wiring:** Use 7-core cable

The **Lock EWA 12.1509** is a compact and efficient gear motor for horizontal shading systems. It combines quiet operation with high reliability and flexible mounting options. The integrated limit switch ensures precise control, making it ideal for smaller or medium-sized greenhouse installations.

Product information

Drive shaft:	Hexagonal shaft (66)
Phase(s):	3
Revolutions per minute:	8,8
Torque (Nm):	150
Voltage (V):	400