Fiberlane LLC.
9254 Richmond Road
US - 18013 - Bangor, PA
USA

Contact:
Telefon: +1 610 498 4474
Fax: +1 610 498 2602
E-Mail:
info@fiberlanellc.com

Overview

Lock EWA / 14.3505 / 350 Nm / 400 V - 4,4 rpm - Welle 66 (6-kant)

Lock GmbH

Product number: 31147744

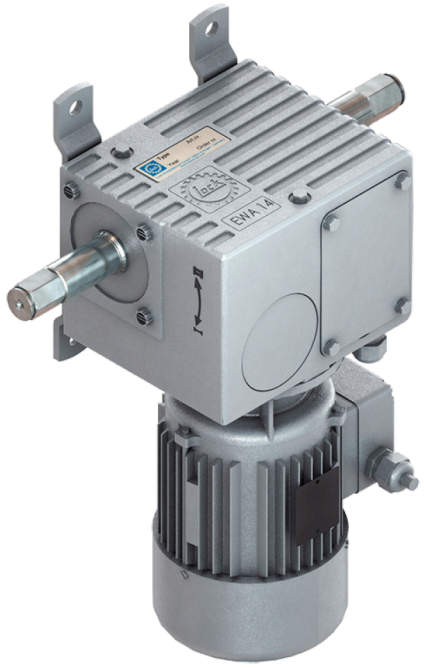

Fiberlane LLC.
9254 Richmond Road
US - 18013 - Bangor, PA
USA

Contact:
Telefon: +1 610 498 4474
Fax: +1 610 498 2602
E-Mail:
info@fiberlanellc.com

Description

Note: This gear motor is no longer being produced. As an alternative, we recommend the Lock EWA 52.3505 350 Nm 4.4 rpm We66 400 V

- **Application:** Drive unit for horizontal shading systems in greenhouses
- **Torque:** 350 Nm
- **Voltage:** 400 V, 3~, 50 Hz
- **Speed:** 4.4 revolutions per minute
- **Power:** 0.25 kW
- **Current:** 2.00 A
- **Shaft:** Type 66 (hexagonal)
- **Limit switch:** Precision gear limit switch END 20 for 580 shaft revolutions
- **Features:**
  - Extremely quiet, self-locking double worm gear
  - Maintenance-free and long-lasting
  - Universal mounting: rear (standard) or optionally left-side (symmetrical)
  - Wiring via 7-core cable

The **Lock EWA 14.3505** with hexagonal shaft offers the same powerful and quiet performance as its round-shaft counterpart. It’s built for horizontal shading systems and features a durable, maintenance-free gear design with precise limit switch control.

Product information

Drive shaft:	Hexagonal shaft (66)
Phase(s):	3
Revolutions per minute:	4,4
Torque (Nm):	350
Voltage (V):	400